

# SWITCHMODE™ Series NPN Silicon Power Transistors

These devices are designed for high-voltage, high-speed power switching inductive circuits where fall time is critical. They are particularly suited for 115 and 220 V SWITCHMODE applications such as Switching Regulator's, Inverters, Motor Controls, Solenoid/Relay drivers and Deflection circuits.


## SPECIFICATION FEATURES:

- $V_{CEO(sus)}$  400 V
- Reverse Bias SOA with Inductive Loads @  $T_C = 100^\circ\text{C}$
- Inductive Switching Matrix 2 to 4 Amp, 25 and  $100^\circ\text{C}$   
 $t_c$  @ 3A,  $100^\circ\text{C}$  is 180 ns (Typ)
- 700 V Blocking Capability
- SOA and Switching Applications Information.

## MJE13005\*

\*ON Semiconductor Preferred Device

**4 AMPERE  
NPN SILICON  
POWER TRANSISTOR  
400 VOLTS  
75 WATTS**



**CASE 221A-09  
TO-220AB**

## MAXIMUM RATINGS

| Rating                                                                                | Symbol            | Value       | Unit                          |
|---------------------------------------------------------------------------------------|-------------------|-------------|-------------------------------|
| Collector-Emitter Voltage                                                             | $V_{CEO(sus)}$    | 400         | Vdc                           |
| Collector-Emitter Voltage                                                             | $V_{CEV}$         | 700         | Vdc                           |
| Emitter Base Voltage                                                                  | $V_{EBO}$         | 9           | Vdc                           |
| Collector Current — Continuous<br>— Peak (1)                                          | $I_C$<br>$I_{CM}$ | 4<br>8      | Adc                           |
| Base Current — Continuous<br>— Peak (1)                                               | $I_B$<br>$I_{BM}$ | 2<br>4      | Adc                           |
| Emitter Current — Continuous<br>— Peak (1)                                            | $I_E$<br>$I_{EM}$ | 6<br>12     | Adc                           |
| Total Power Dissipation @ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$             | 2<br>16     | Watts<br>mW/ $^\circ\text{C}$ |
| Total Power Dissipation @ $T_C = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$             | 75<br>600   | Watts<br>mW/ $^\circ\text{C}$ |
| Operating and Storage Junction Temperature Range                                      | $T_J, T_{stg}$    | -65 to +150 | $^\circ\text{C}$              |

## THERMAL CHARACTERISTICS

| Characteristic                                                                   | Symbol          | Max  | Unit                      |
|----------------------------------------------------------------------------------|-----------------|------|---------------------------|
| Thermal Resistance, Junction to Ambient                                          | $R_{\theta JA}$ | 62.5 | $^\circ\text{C}/\text{W}$ |
| Thermal Resistance, Junction to Case                                             | $R_{\theta JC}$ | 1.67 | $^\circ\text{C}/\text{W}$ |
| Maximum Lead Temperature for Soldering<br>Purposes: 1/8" from Case for 5 Seconds | $T_L$           | 275  | $^\circ\text{C}$          |

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle  $\leq$  10%.

# MJE13005

## ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

### \*OFF CHARACTERISTICS

|                                                                                                                                                                                                    |                |     |   |        |      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----|---|--------|------|
| Collector–Emitter Sustaining Voltage<br>( $I_C = 10\text{ mA}$ , $I_B = 0$ )                                                                                                                       | $V_{CEO(sus)}$ | 400 | — | —      | Vdc  |
| Collector Cutoff Current<br>( $V_{CEV} = \text{Rated Value}$ , $V_{BE(off)} = 1.5\text{ Vdc}$ )<br>( $V_{CEV} = \text{Rated Value}$ , $V_{BE(off)} = 1.5\text{ Vdc}$ , $T_C = 100^\circ\text{C}$ ) | $I_{CEV}$      | —   | — | 1<br>5 | mAdc |
| Emitter Cutoff Current<br>( $V_{EB} = 9\text{ Vdc}$ , $I_C = 0$ )                                                                                                                                  | $I_{EBO}$      | —   | — | 1      | mAdc |

### SECOND BREAKDOWN

|                                                             |           |  |  |               |  |
|-------------------------------------------------------------|-----------|--|--|---------------|--|
| Second Breakdown Collector Current with base forward biased | $I_{S/b}$ |  |  | See Figure 11 |  |
| Clamped Inductive SOA with Base Reverse Biased              | RBSOA     |  |  | See Figure 12 |  |

### \*ON CHARACTERISTICS

|                                                                                                                                                                                                                                                                                    |               |                  |                  |                      |     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------|------------------|----------------------|-----|
| DC Current Gain<br>( $I_C = 1\text{ Adc}$ , $V_{CE} = 5\text{ Vdc}$ )<br>( $I_C = 2\text{ Adc}$ , $V_{CE} = 5\text{ Vdc}$ )                                                                                                                                                        | $h_{FE}$      | 10<br>8          | —<br>—           | 60<br>40             | —   |
| Collector–Emitter Saturation Voltage<br>( $I_C = 1\text{ Adc}$ , $I_B = 0.2\text{ Adc}$ )<br>( $I_C = 2\text{ Adc}$ , $I_B = 0.5\text{ Adc}$ )<br>( $I_C = 4\text{ Adc}$ , $I_B = 1\text{ Adc}$ )<br>( $I_C = 2\text{ Adc}$ , $I_B = 0.5\text{ Adc}$ , $T_C = 100^\circ\text{C}$ ) | $V_{CE(sat)}$ | —<br>—<br>—<br>— | —<br>—<br>—<br>— | 0.5<br>0.6<br>1<br>1 | Vdc |
| Base–Emitter Saturation Voltage<br>( $I_C = 1\text{ Adc}$ , $I_B = 0.2\text{ Adc}$ )<br>( $I_C = 2\text{ Adc}$ , $I_B = 0.5\text{ Adc}$ )<br>( $I_C = 2\text{ Adc}$ , $I_B = 0.5\text{ Adc}$ , $T_C = 100^\circ\text{C}$ )                                                         | $V_{BE(sat)}$ | —<br>—<br>—      | —<br>—<br>—      | 1.2<br>1.6<br>1.5    | Vdc |

### DYNAMIC CHARACTERISTICS

|                                                                                                                 |          |   |    |   |     |
|-----------------------------------------------------------------------------------------------------------------|----------|---|----|---|-----|
| Current–Gain — Bandwidth Product<br>( $I_C = 500\text{ mAdc}$ , $V_{CE} = 10\text{ Vdc}$ , $f = 1\text{ MHz}$ ) | $f_T$    | 4 | —  | — | MHz |
| Output Capacitance<br>( $V_{CB} = 10\text{ Vdc}$ , $I_E = 0$ , $f = 0.1\text{ MHz}$ )                           | $C_{ob}$ | — | 65 | — | pF  |

### SWITCHING CHARACTERISTICS

| Resistive Load (Table 2)                     |                                                                                                                                                    |          |   |       |     |               |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|----------|---|-------|-----|---------------|
| Delay Time                                   | $(V_{CC} = 125\text{ Vdc}$ , $I_C = 2\text{ A}$ ,<br>$I_{B1} = I_{B2} = 0.4\text{ A}$ , $t_p = 25\text{ }\mu\text{s}$ ,<br>Duty Cycle $\leq 1\%$ ) | $t_d$    | — | 0.025 | 0.1 | $\mu\text{s}$ |
| Rise Time                                    |                                                                                                                                                    | $t_r$    | — | 0.3   | 0.7 | $\mu\text{s}$ |
| Storage Time                                 |                                                                                                                                                    | $t_s$    | — | 1.7   | 4   | $\mu\text{s}$ |
| Fall Time                                    |                                                                                                                                                    | $t_f$    | — | 0.4   | 0.9 | $\mu\text{s}$ |
| Inductive Load, Clamped (Table 2, Figure 13) |                                                                                                                                                    |          |   |       |     |               |
| Voltage Storage Time                         | $(I_C = 2\text{ A}$ , $V_{clamp} = 300\text{ Vdc}$ ,<br>$I_{B1} = 0.4\text{ A}$ , $V_{BE(off)} = 5\text{ Vdc}$ , $T_C = 100^\circ\text{C}$ )       | $t_{sv}$ | — | 0.9   | 4   | $\mu\text{s}$ |
| Crossover Time                               |                                                                                                                                                    | $t_c$    | — | 0.32  | 0.9 | $\mu\text{s}$ |
| Fall Time                                    |                                                                                                                                                    | $t_{fi}$ | — | 0.16  | —   | $\mu\text{s}$ |

\*Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle = 2%.

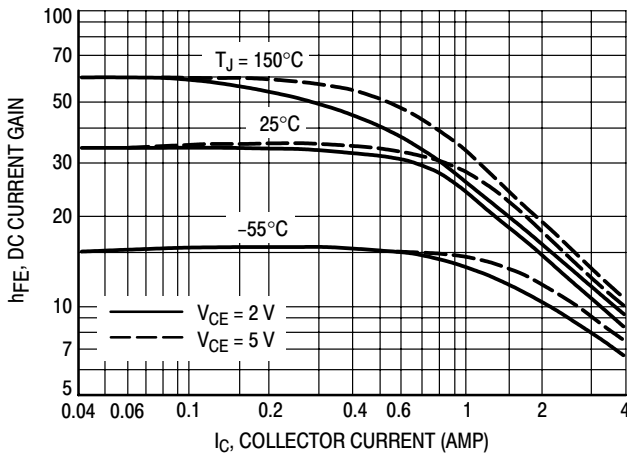


Figure 1. DC Current Gain

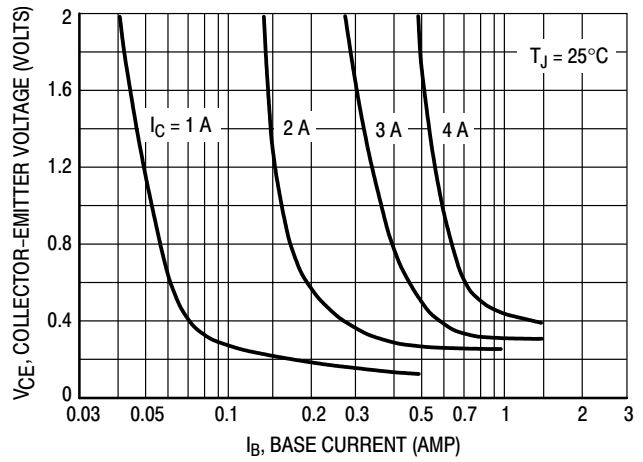


Figure 2. Collector Saturation Region

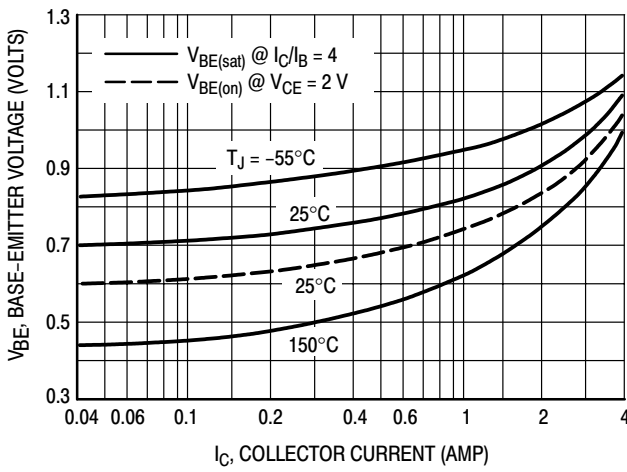


Figure 3. Base-Emitter Voltage

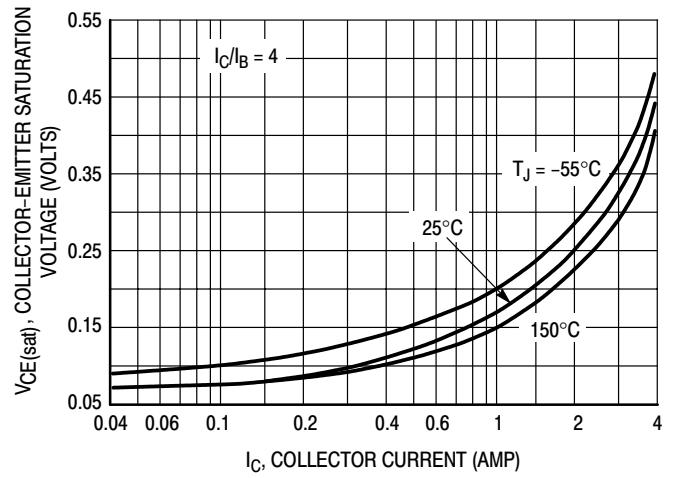


Figure 4. Collector-Emitter Saturation Voltage

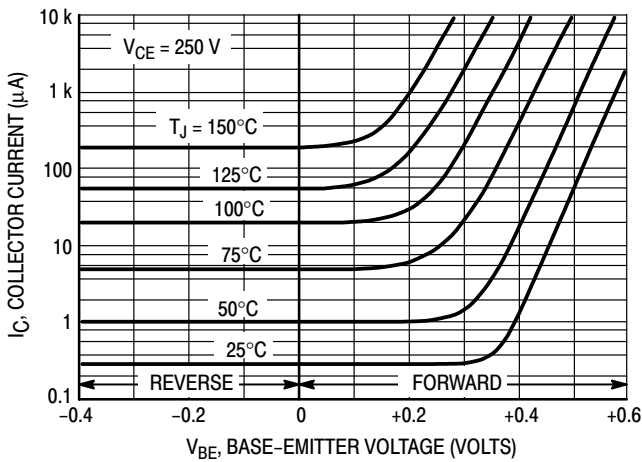


Figure 5. Collector Cutoff Region

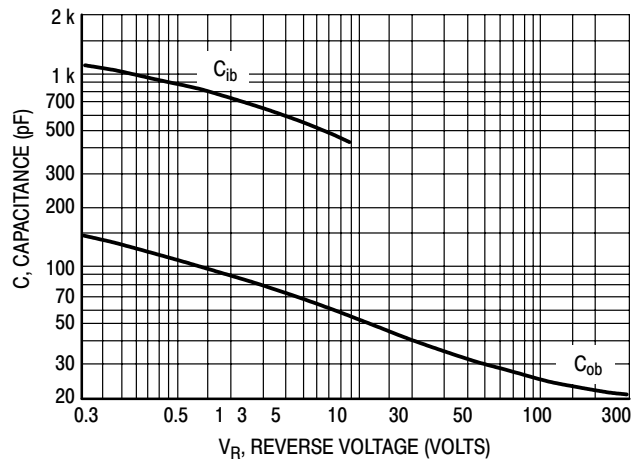


Figure 6. Capacitance

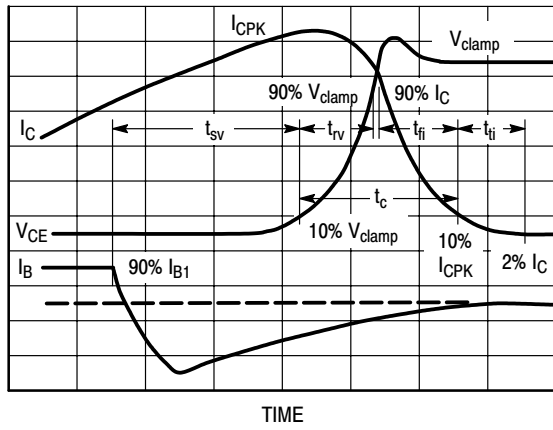


Figure 7. Inductive Switching Measurements

Table 1. Typical Inductive Switching Performance

| I <sub>C</sub><br>AMP | T <sub>C</sub><br>°C | t <sub>sv</sub><br>ns | t <sub>rv</sub><br>ns | t <sub>fi</sub><br>ns | t <sub>ti</sub><br>ns | t <sub>c</sub><br>ns |
|-----------------------|----------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------------------|
| 2                     | 25                   | 600                   | 70                    | 100                   | 80                    | 180                  |
|                       | 100                  | 900                   | 110                   | 240                   | 130                   | 320                  |
| 3                     | 25                   | 650                   | 60                    | 140                   | 60                    | 200                  |
|                       | 100                  | 950                   | 100                   | 330                   | 100                   | 350                  |
| 4                     | 25                   | 550                   | 70                    | 160                   | 100                   | 220                  |
|                       | 100                  | 850                   | 110                   | 350                   | 160                   | 390                  |

NOTE: All Data recorded in the inductive Switching Circuit In Table 2.

**SWITCHING TIMES NOTE**

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

- t<sub>sv</sub> = Voltage Storage Time, 90% I<sub>B1</sub> to 10% V<sub>clamp</sub>
- t<sub>rv</sub> = Voltage Rise Time, 10–90% V<sub>clamp</sub>
- t<sub>fi</sub> = Current Fall Time, 90–10% I<sub>C</sub>
- t<sub>ti</sub> = Current Tail, 10–2% I<sub>C</sub>
- t<sub>c</sub> = Crossover Time, 10% V<sub>clamp</sub> to 10% I<sub>C</sub>

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2 V_{CC} I_C (t_c) f$$

In general, t<sub>rv</sub> + t<sub>fi</sub> ≈ t<sub>c</sub>. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a “SWITCHMODE” transistor are the inductive switching speeds (t<sub>c</sub> and t<sub>sv</sub>) which are guaranteed at 100°C.

**RESISTIVE SWITCHING PERFORMANCE**

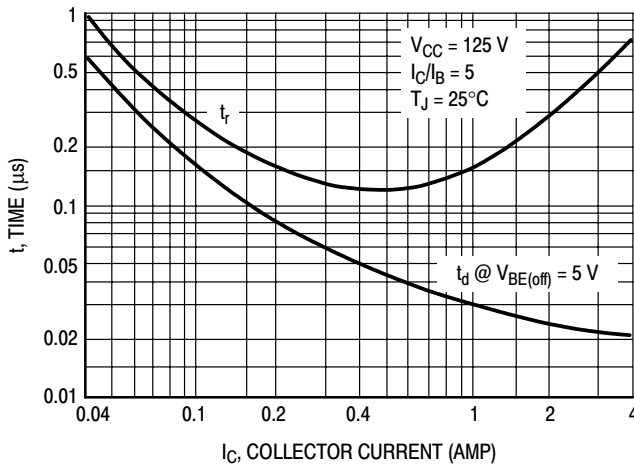


Figure 8. Turn-On Time

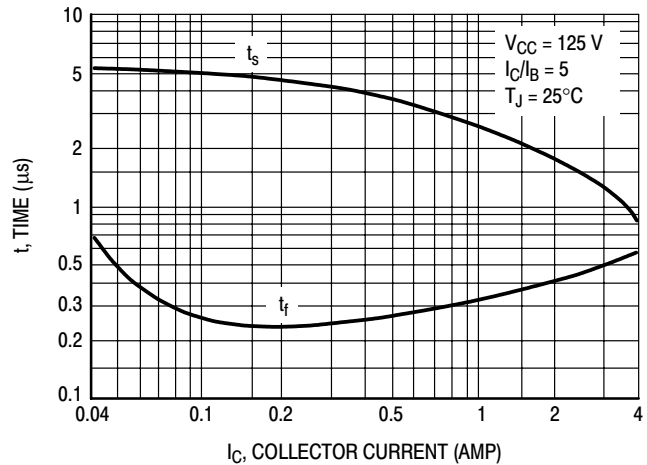


Figure 9. Turn-Off Time

# MJE13005

Table 2. Test Conditions for Dynamic Performance

| REVERSE BIAS SAFE OPERATING AREA AND INDUCTIVE SWITCHING |                                                                                                                                                                                                                                                           | RESISTIVE SWITCHING                                                                                                                                                            |
|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TEST CIRCUITS                                            | <p>DUTY CYCLE <math>\leq 10\%</math><br/> <math>t_r, t_f \leq 10</math> ns</p> <p>NOTE<br/>           PW and <math>V_{CC}</math> Adjusted for Desired <math>I_C</math><br/> <math>R_B</math> Adjusted for Desired <math>I_{B1}</math></p>                 |                                                                                                                                                                                |
| CIRCUIT VALUES                                           | Coil Data:<br>Ferroxcube Core #6656<br>Full Bobbin (~16 Turns) #16<br>GAP for 200 $\mu$ H/20 A<br>$L_{coil} = 200 \mu$ H<br>$V_{CC} = 20$ V<br>$V_{clamp} = 300$ Vdc                                                                                      | $V_{CC} = 125$ V<br>$R_C = 62 \Omega$<br>$D1 = 1N5820$ or Equiv.<br>$R_B = 22 \Omega$                                                                                          |
| TEST WAVEFORMS                                           | <p><math>t_1</math> ADJUSTED TO OBTAIN <math>I_C</math></p> $t_1 \approx \frac{L_{coil} (I_{C(pk)})}{V_{CC}}$ $t_2 \approx \frac{L_{coil} (I_{C(pk)})}{V_{clamp}}$ <p>Test Equipment<br/>           Scope—Tektronics<br/>           475 or Equivalent</p> | <p><math>t_r, t_f &lt; 10</math> ns<br/>           Duty Cycle = 1.0%<br/> <math>R_B</math> and <math>R_C</math> adjusted for desired <math>I_B</math> and <math>I_C</math></p> |

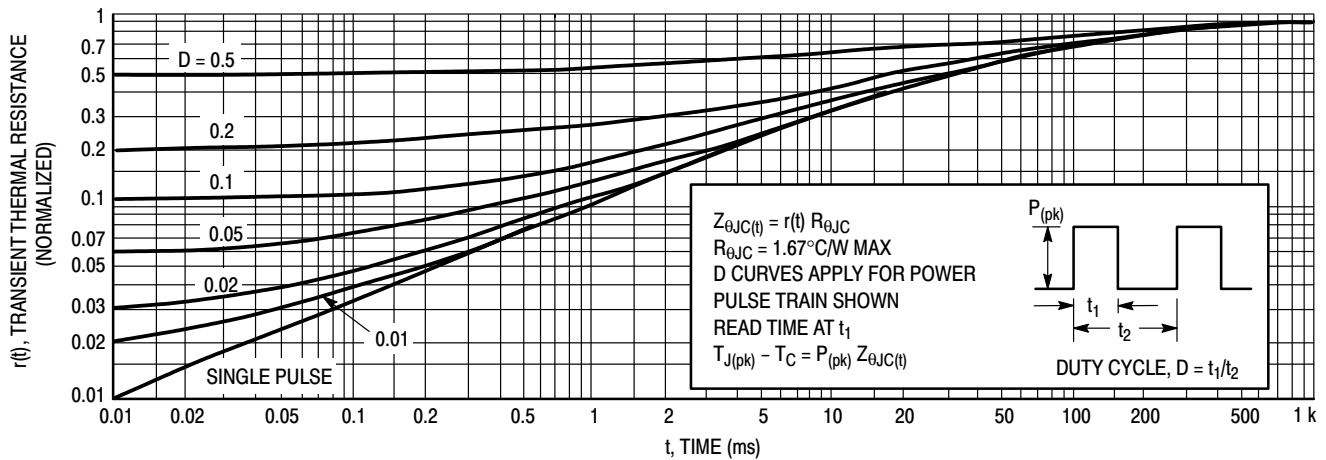


Figure 10. Typical Thermal Response [ $Z_{\theta JC}(t)$ ]

SAFE OPERATING AREA INFORMATION

The Safe Operating Area Figures 11 and 12 are specified ratings for these devices under the test conditions shown.

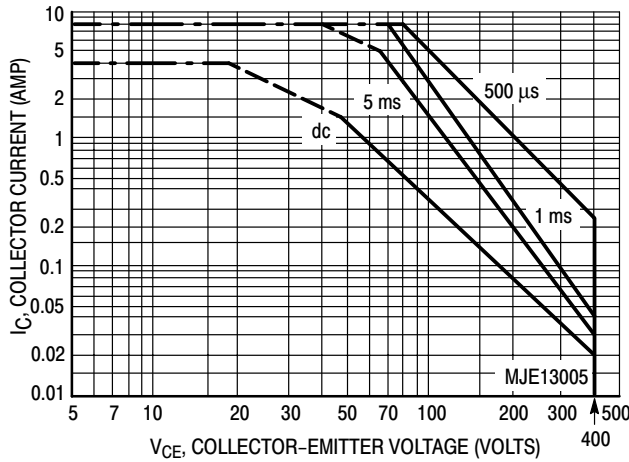


Figure 11. Forward Bias Safe Operating Area

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate  $I_C - V_{CE}$  limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on  $T_C = 25^\circ\text{C}$ ;  $T_{J(pk)}$  is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when  $T_C \geq 25^\circ\text{C}$ . Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 11 may be found at any case temperature by using the appropriate curve on Figure 13.

$T_{J(pk)}$  may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

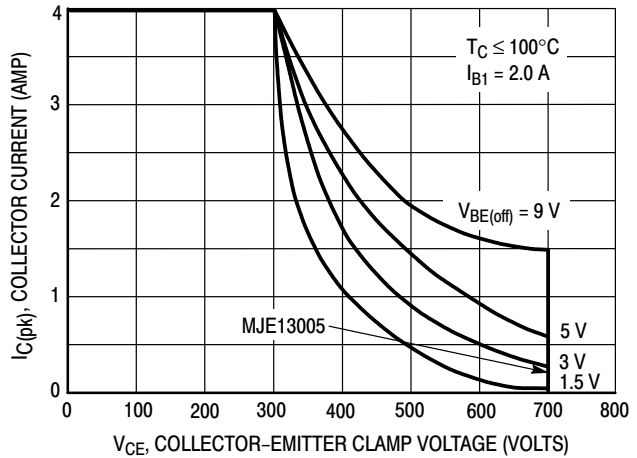


Figure 12. Reverse Bias Switching Safe Operating Area

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 12 gives the complete RBSOA characteristics.


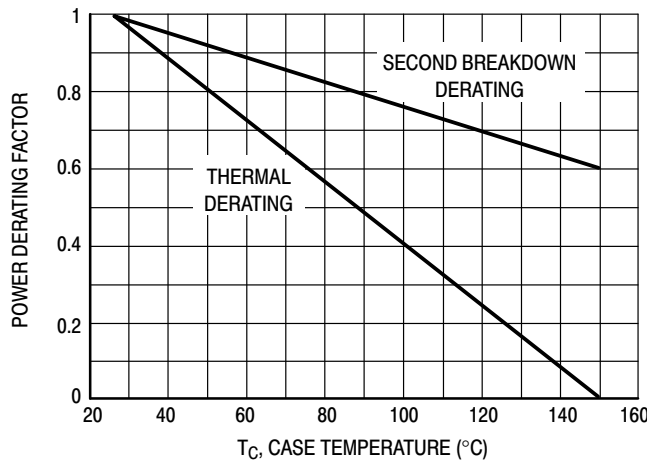


Figure 13. Forward Bias Power Derating

# MJE13005

## PACKAGE DIMENSIONS

### TO-220AB CASE 221A-09 ISSUE AA

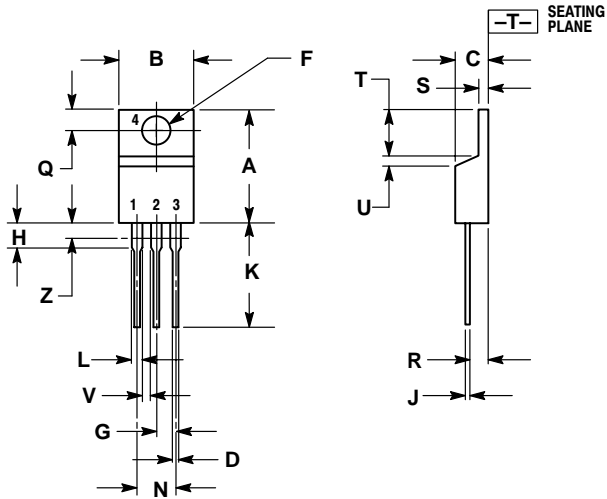

#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 0.570  | 0.620 | 14.48       | 15.75 |
| B   | 0.380  | 0.405 | 9.66        | 10.28 |
| C   | 0.160  | 0.190 | 4.07        | 4.82  |
| D   | 0.025  | 0.035 | 0.64        | 0.88  |
| F   | 0.142  | 0.147 | 3.61        | 3.73  |
| G   | 0.095  | 0.105 | 2.42        | 2.66  |
| H   | 0.110  | 0.155 | 2.80        | 3.93  |
| J   | 0.018  | 0.025 | 0.46        | 0.64  |
| K   | 0.500  | 0.562 | 12.70       | 14.27 |
| L   | 0.045  | 0.060 | 1.15        | 1.52  |
| N   | 0.190  | 0.210 | 4.83        | 5.33  |
| Q   | 0.100  | 0.120 | 2.54        | 3.04  |
| R   | 0.080  | 0.110 | 2.04        | 2.79  |
| S   | 0.045  | 0.055 | 1.15        | 1.39  |
| T   | 0.235  | 0.255 | 5.97        | 6.47  |
| U   | 0.000  | 0.050 | 0.00        | 1.27  |
| V   | 0.045  | ---   | 1.15        | ---   |
| Z   | ---    | 0.080 | ---         | 2.04  |

SWITCHMODE is a trademark of Semiconductor Components Industries, LLC.

**ON Semiconductor** and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

## PUBLICATION ORDERING INFORMATION

### **NORTH AMERICA Literature Fulfillment:**

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** ONlit@hibbertco.com  
Fax Response Line: 303-675-2167 or 800-344-3810 Toll Free USA/Canada

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**EUROPE:** LDC for ON Semiconductor – European Support

**German Phone:** (+1) 303-308-7140 (Mon-Fri 2:30pm to 7:00pm CET)  
**Email:** ONlit-german@hibbertco.com  
**French Phone:** (+1) 303-308-7141 (Mon-Fri 2:00pm to 7:00pm CET)  
**Email:** ONlit-french@hibbertco.com  
**English Phone:** (+1) 303-308-7142 (Mon-Fri 12:00pm to 5:00pm GMT)  
**Email:** ONlit@hibbertco.com

**EUROPEAN TOLL-FREE ACCESS\*: 00-800-4422-3781**

\*Available from Germany, France, Italy, UK, Ireland

### **CENTRAL/SOUTH AMERICA:**

**Spanish Phone:** 303-308-7143 (Mon-Fri 8:00am to 5:00pm MST)  
**Email:** ONlit-spanish@hibbertco.com  
**Toll-Free from Mexico:** Dial 01-800-288-2872 for Access –  
then Dial 866-297-9322

**ASIA/PACIFIC:** LDC for ON Semiconductor – Asia Support

**Phone:** 1-303-675-2121 (Tue-Fri 9:00am to 1:00pm, Hong Kong Time)  
**Toll Free from Hong Kong & Singapore:**  
**001-800-4422-3781**

**Email:** ONlit-asia@hibbertco.com

**JAPAN:** ON Semiconductor, Japan Customer Focus Center

4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-0031  
**Phone:** 81-3-5740-2700  
**Email:** r14525@onsemi.com

**ON Semiconductor Website:** <http://onsemi.com>

For additional information, please contact your local Sales Representative.